


### QUICK DUMP VALVE

- ◆ LARGE DRAINAGE CAPACITY
- ◆ POLYPROPYLENE OR PVDF CONSTRUCTION
- ◆ STANDARD WELDING RING MOUNTING
- ◆ EASY TO SERVICE—SIMPLY UNSCREWS
- ◆ SPRING RETURN OPTIONAL
- ◆ LONG-LIFE, HARD-TAPERED SEAL



### SPECIFICATIONS

Size		2"	4"	4" High Flow
Body Diameter –	inches (mm)	3.0 (76)	5.0 (127)	5.0 (127)
Door Diameter –	inches (mm)	2.5 (64)	4.0 (102)	4.0 (102)
Stroke –	inches (mm)	0.65 (17)	0.65 (17)	1.25 (32)
Max Pressure –	inches of H <sub>2</sub> O (mm of H <sub>2</sub> O)	25 (635)	25 (635)	25 (635)
Actuator Pressure –	Min/Max PSIG (kPa)	60/70 (414/483)	45/70 (310/483)	45/70 (310/483)
Max Temperature –	Media °F (°C)			
	POLYPROPYLENE	160 (71)	160 (71)	160 (71)
	PVDF	212 (100)	212 (100)	212 (100)
Max Temperature –	Ambient °F (°C)			
	POLYPROPYLENE	160 (71)	160 (71)	160 (71)
	PVDF	212 (100)	212 (100)	212 (100)

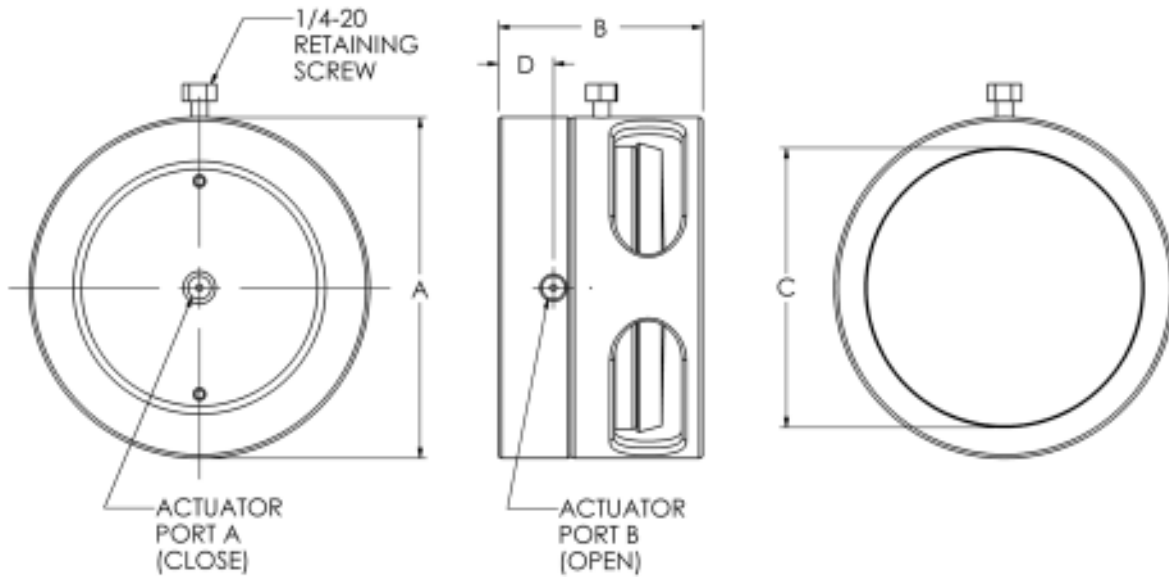

SIZE	A	B	C	D	PORT A	PORT B
2"	3.00	3.00	2.00	0.81	1/8 FNPT	1/8 FNPT
4"	5.00	3.00	4.00	0.81	1/8 FNPT	1/8 FNPT
4" HIGH FLOW	5.00	4.00	4.00	1.50	1/8 FNPT	1/8 FNPT

Specifications subject to change without notice.

All dimensions are in inches.

## ORDERING INFORMATION

**QDV X X X XXX X XXX**

**OPTIONS:** ### - Non-Standard Options  
(Consult Factory)

**SEALS:**  
 V - Viton®  
 E - Ethylene Propylene  
 K - Kalrez®

**MATERIAL:** POL - Polypropylene  
 PVD - PVDF

**CLOSURE:** 0 - Air  
 1 - Spring

**FLOW:** 0 - Standard  
 1 - High

**SIZE:** 2 - 2"  
 4 - 4"

**QUICK DUMP VALVE SERIES**

® Viton and Kalrez are registered trademarks of the Dupont Corporation.

LS-DQDV01-01

**DYTEC**  
 CORPORATION

102 Compass Point Dr., Suite D  
 St. Charles, MO 63301  
 636-949-5600 Fax: 636-724-2492  
 www.dytec.com